

MELLOTT COMPANY

Technical Data

MC6203D SCREEN PLANT



CHASSIS

- Heavy Duty Fabricated Frame w/ Cribbing Supports
- Fold Down Kingpin Cribbing Supports
- Tandem Axle Suspension w/Eight IIR 24.5 Tires
- Road Ready (Airbrakes, Mud Flaps)
- Access Stair

SCREEN

- Superior Guardian Horizontal Screen
- Adjustable Motor Base
- Right Hand Drive
- 40 HP, 1200 RPM, TEFC (NEMA C) Motor
- Replaceable Feed Box & Discharge Lip Liners
- Deck Design for Side Tensioned Media

CHUTES AND HOPPERS

- 1/4" MS Fines Hopper w/ 1/4" AR Liners
- 1/4" MS Discharge Chute w/ 1/4" AR Liners
- Blending Top and Bottom to Middle Deck

UNDER SCREEN FINES CONVEYOR


- 60" Horizontal Fines Conveyor
25'-3" Long
- Dodge 10 HP Motorized Gearbox/
Pulley
- Manual Screw Take-ups
- Flexco EZP-1 Primary Belt Cleaner
- Channel Frame Construction

AVAILABLE OPTIONS

- Pre-Wired Electrical Starter Panel
- Hydraulic Leveling Legs w/ Power Pack
- Screen Media/Installation
- Top Deck Oversize Chute Extension



MELLOTT COMPANY

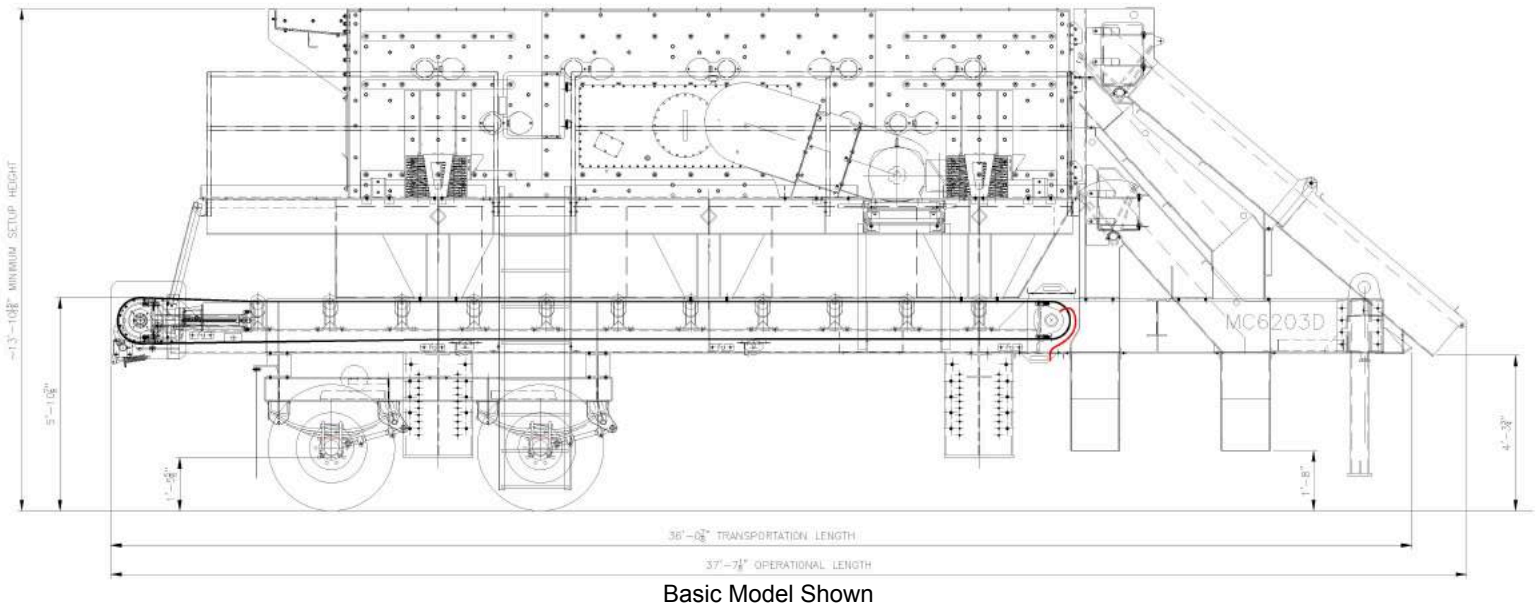

PHYSICAL/OPERATING CHARACTERISTICS

- Overall Length 37'-7¹/₈"
- Overall Height 13'-10¹⁵/₁₆"
- Operating Width 12'-8⁹/₁₆"
- Ground Clearance 1'-5⁵/₈"
- Travel Width 11'-10¹/₈"
- Top Deck OS Chute Discharge Height 4'-3³/₄"
- Fines Discharge Height 1'-8"
- Screen Discharge Chute Height 1'-6¹¹/₁₆"
- Under Screen Fines Conveyor Discharge Height 8'-10⁵/₁₆"

Total Unit Weight.....55000 Lbs

Specifications are subject to change without notice.

Model MC6203D 032020-REV 1

100 MELLOTT DRIVE, WARFORDSBURG, PA 17267 ■ WWW.MELLOTTCOMPANY.COM

AGGREGATE, SLAG, CONSTRUCTION AND POWER INDUSTRIES

FOR MORE INFORMATION CONTACT

800-634-5634

SALES@MELLOTTSCOM